Best of both worlds, add a 4PDT Switch for Humbucker Sound!
Please see the MT-16 Wiring as the "Sweet Sixteen + Humbucker" (Fig. 4)

MT-32 Switch Rev. A 4/14/2026

16 Very Cool Sounds for HSS and HH with 15 Single Coil Sounds Plus an Instant Bridge Humbucker Sound!

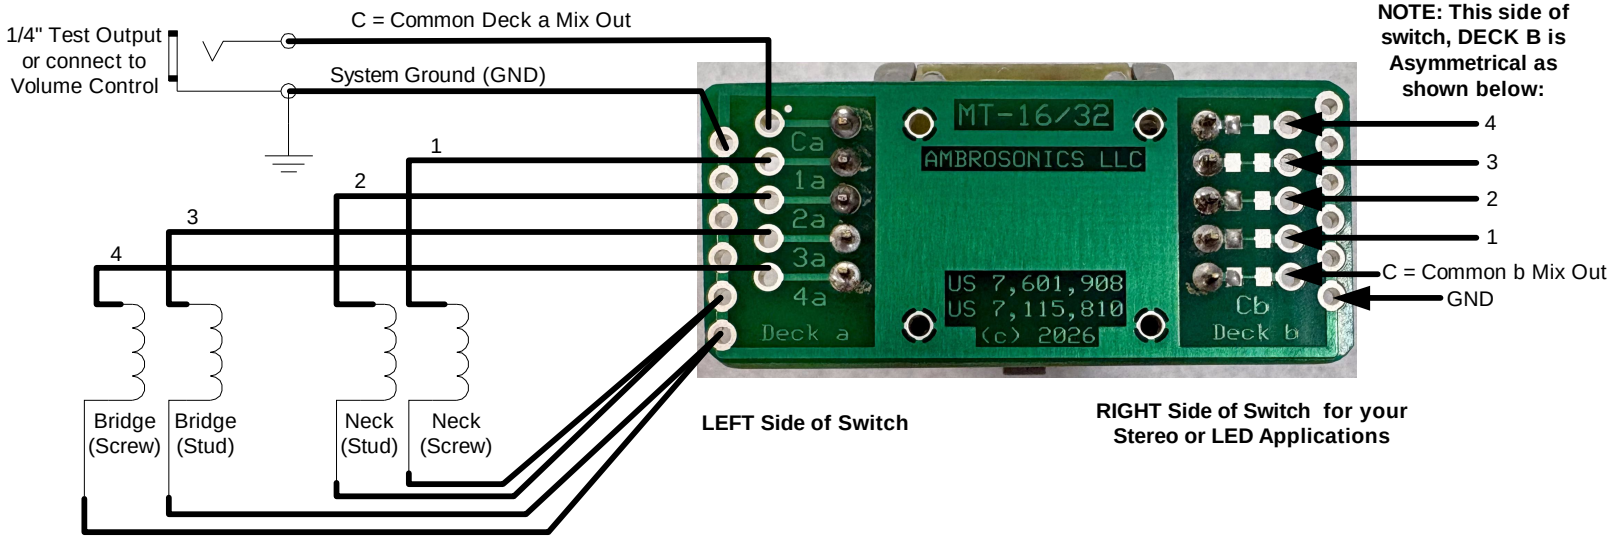

LEFT Side of Switch

RIGHT Side of Switch for your Stereo or LED Applications

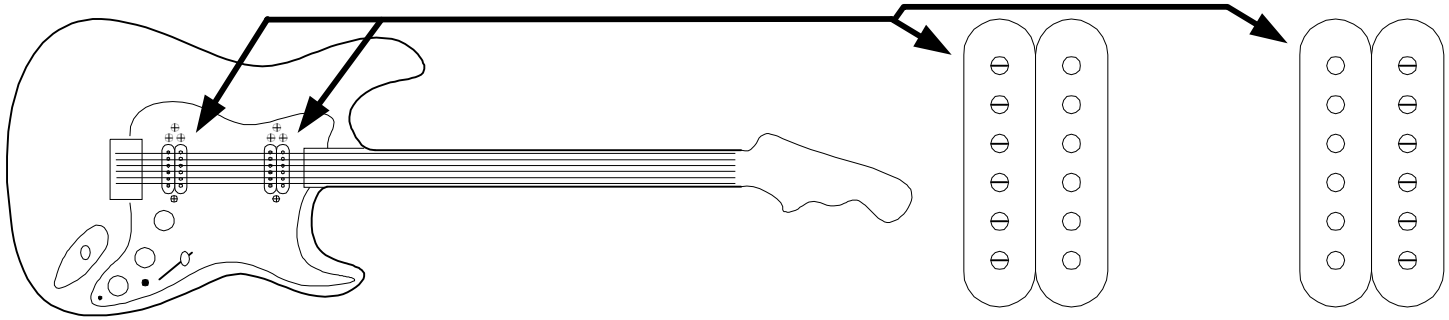

Position "0" = All Pickups Off; See arrow marking

Patents 7,601,908 & 7,115,810

One Switch Provides the switch closures shown in the chart below X 2! (Left side & Right side of switch)

Full Combinations of 15 True Single Coil In Phase Sounds using Humbuckers as Single Coils

Switch Positions / Pickup Coils	Switch Position Numbers	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Neck Humbucker (Screw) 1	=	OFF	●	●			●	●			●	●			●	●	
Neck Humbucker (Stud) 2	=	OFF		●	●	●	●					●	●	●	●		
Bridge Humbucker (Stud) 3	=	OFF				●	●	●	●	●	●	●	●				
Bridge Humbucker (Screw) 4	=	OFF								●	●	●	●	●	●	●	●
Note: ● = Pickup is ON																	