


Pickup Director Standard 23 Wirings Typical S/S/S Set Up

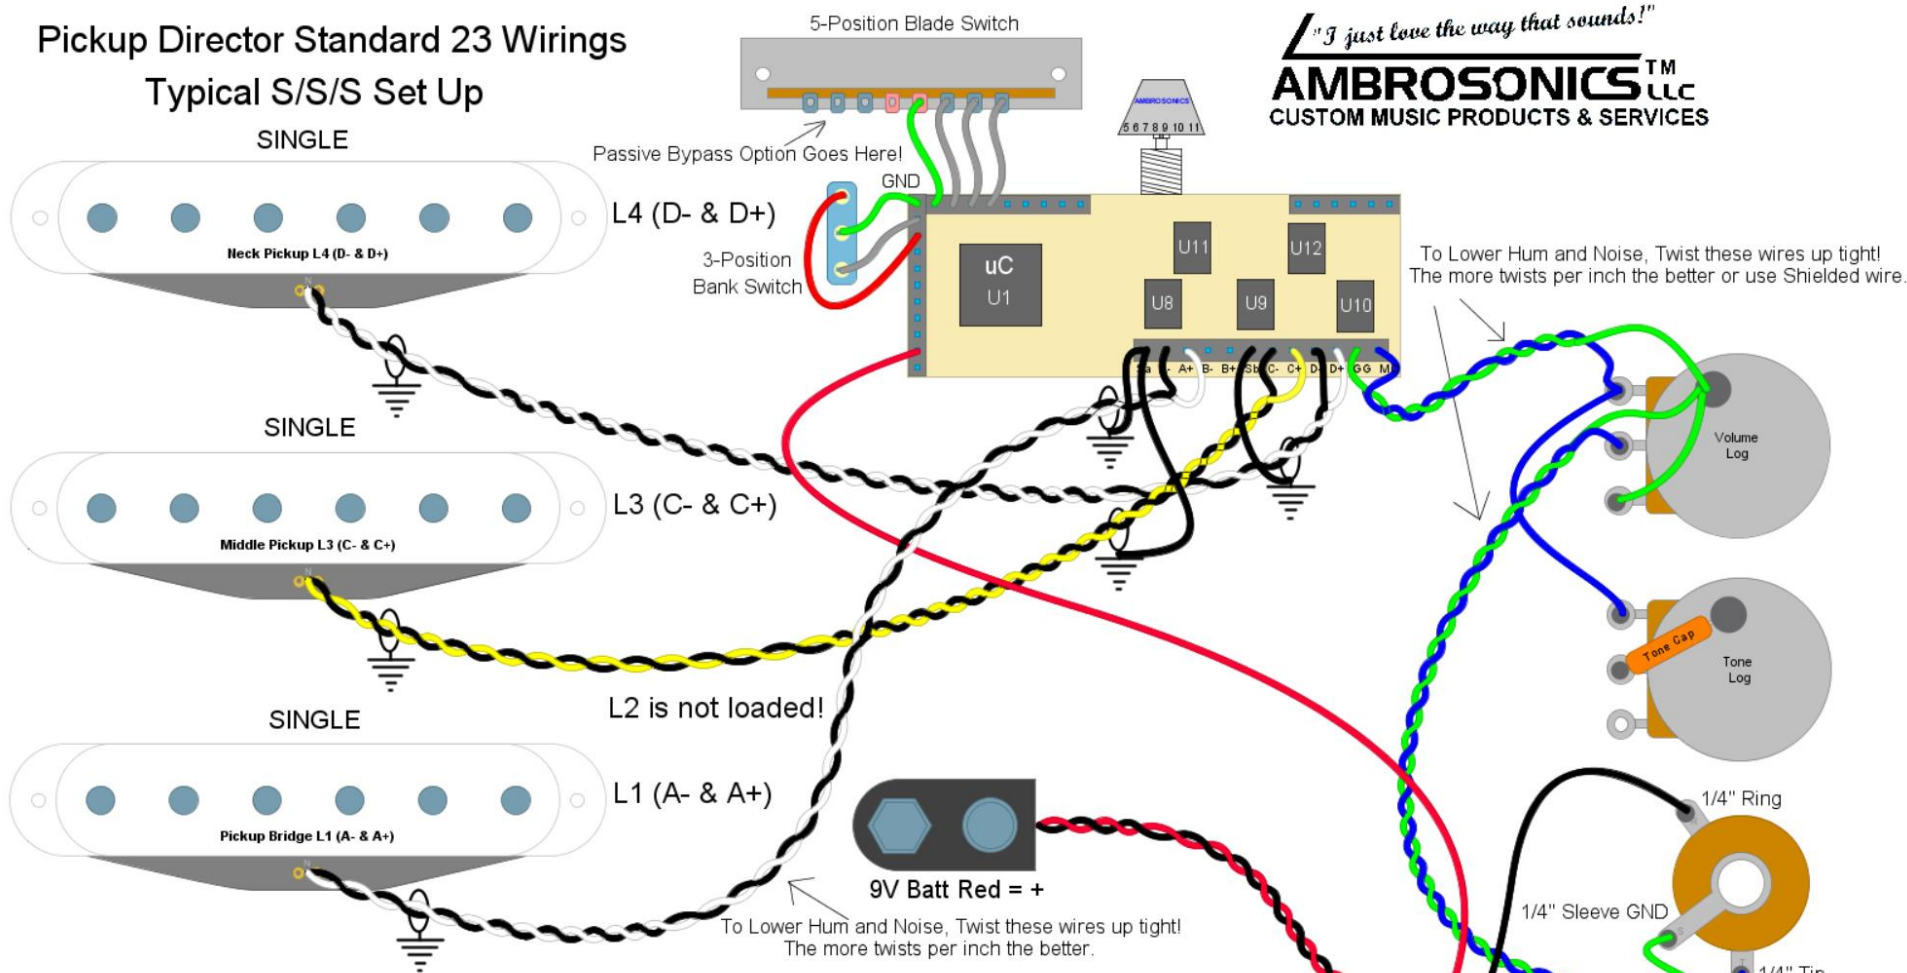

For absolute best performance with Single Coils please use 2-Conductor + a Shield wire with one end of the braided Shield connected to Sa (Shield a) or Sb (Shield b) at the Pickup Director PCB and left open at the Pickup end.